



# Bluetooth Lavalier Microphone





### **Clear sound quality**

Clear pickup and ideal for conference chairpersons, speakers, lecturers, etc.



#### Lightweight and portable

Compact and light lavalier design for convenient wear and use.



#### **Expandability**

Connect multiple iMage A6 with iMage M6 (optional) for meeting rooms of medium or large capacity.



### Simple and fast operations

Plug and play without software installation or help by IT personnel.



#### Powerful device adaptability

Connect with a range of devices including computers, notebooks, smartphones and tablets or video conference host (through Bluetooth with optional iMage M6).



## Flexible applications with configuration as needed

Either clip to a necktie or place on a desk to free users from the hassle to locate it.






#### Features of iMage A7


The compact iMage A7 wireless lavalier microphone features a clip-on design for users to wear along with clear and accurate pickup. The optional iMage M6 enables it to connect to devices including desktop and notebook computers, smartphones, and tablets. The optional iMage M6 may connect to video conference hosts or cascade connecting

multiple iMage A7's for different meeting room applications including training, classroom lectures, and commercial meetings.

#### Key position



#### Mode outline

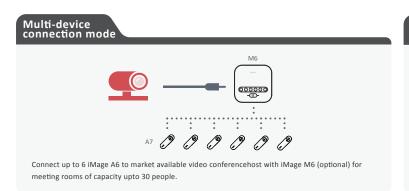





You may pair and connect iMage A7 to a smartphone, tablet, and other mobile devices in Bluetooth mode for meeting calls. (BT mode is disable by default and needs to be enable through the APP)

#### **Specifications**

#### A. General specifications

Product name	iMage A7
Volume	73mm X 25mm X 20mm
Weight	20±5 g
Operating Environment	0~60℃±2℃
Items included	USB cable $\times$ 1, Operation manual $\times$ 1

#### D. Audio specifications

Microphone	360-degree omni-directional microphone
Audio Pickup Frequency	100-20,000Hz
Audio Pickup Scope	20~100cm
Playback	3.5mm Phone Jack

Options



Connect up to 6 iMage A7 Speakerphone meeting rooms of capacity for 12-30 people in a fast and economic way without retrofication and rewiring; system setup and configuration without help of IT personnel while the Lavalier Microphone can be placed anywhere at your wishes or as required by room layout.

#### B. Connectivity

Audio Input Audio Output	Bluetooth
Connect To	Connect to video conference system via i MageTech     M6 (optional)     Connect to smartphone and tablet with Bluetooth
Operating System Compatible	Windows, Mac OS

# E. Power

Battery	260mAh
Talk Time	About 12 hours
Standby Time	About 160 hours
Transformer	Charge via USB
Voltage	DC 5V±5% 550mA

# iMage Dongle



iMage Dongle Helps you connect iMage A7 to computer via Bluetooth. With its exclusive antenna design, it does not conflict with other Bluetooth devices. It works under low power consumption and supports Bluetooth audio transmission, which completely solve the problem of unstable connection between computer and audio device via Bluetooth.

#### C. Bluetooth specifications

Bluetooth Release	5.0 (HFP \ HSP \ AVRCP \ A2DP)
Coverage	Up to 10 meters (without interference)
Wireless Emission Specifications	Class 2
Antenna Form	Built-in antenna
Bandwidth	2.4-2.4835gHz
Carrier Frequency	2,402-2,480MHz
Channel Count	79

#### F. Digital signal processing

1. Full-Space Technology	4. Full duplex support
2. Echo cancellation	5. Background noise reduction
3. High-quality voice call	6. Automatic gain